

ESS LIFTS - AN AUTHORIZED DEALER


www.esslifts.com


SFH22AG

1KG=2.2LB 1INCH=25.4MM

Model Capacity	lbs	SFH22-63	SFH22-98	SFH22-118
	lbs	ı		OI 1122-110
		2200	2200	2200
Lifting Height Max.	inch	63	98	118
Lifting Height Min.	inch	23/4	23/4	23/4
	I			
Fork Length	inch	36	36	36
Fork Width	inch	4	4	4
Outer width of forks	inch	8.5-33.5	8.5-33.5	8.5-33.5
Base legs I.D.	inch	36 to 48	36 to 48	36 to 48
Base legs O.D.	inch	43 to 54	43 to 54	43 to 54
	1		ı	
Overall Length	inch	56	56	56
Overall Width	inch	43 to 54	43 to 54	43 to 54
Overall Height	inch	791/2	693/4	791/2
	İ		1	
Load Center	inch	20	20	20
Front Caster Dia.	inch	4	4	4
Rear Caster Dia.	inch	7	7	7
Front Wheel Dia.	inch	5	5	5
Rear Wheel Dia.	inch	7	7	7
Wheel Type	inch	2 Rigid,2 Swivel	2 Rigid,2 Swivel	2 Rigid,2 Swivel
Shipping Weight	lbs	705	795	850

SFH22AG

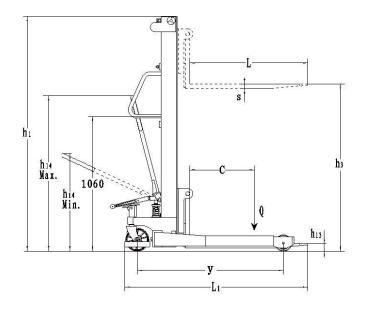





SPN22AG

1KG=2.2LB 1INCH=25.4MM

Manual Hydraulic Stackers – Adjustable Base Legs							
Model		SPN22-63	SPN22-98	SPN22-118	SPN22-138		
Capacity	lbs	2200	2200	2200	2200		
Lifting Height Max.	inch	63	98	118	138		
Lifting Height Min.	inch	21/8	21/8	21/8	21/8		
			F 	 	f 		
Fork Length	inch	42	42	42	42		
Fork Width	inch	4	4	4	4		
Base legs I.D.	inch	38 to 50	38 to 50	38 to 50	38 to 50		
Base legs O.D.	inch	46 to 58	46 to 58	46 to 58	46 to 58		
Overall Length	inch	661/2	661/2	661/2	661/2		
Overall Width	inch	46 to 58	46 to 58	46 to 58	46 to 58		
Overall Height	inch	80	72	82	891/2		
	1 1			[1		
Load Center	inch	24	24	24	24		
Voltage	V	12	12	12	12		
Rear Caster Dia.	inch	7	7	7	7		
Front Wheel Dia.	inch	5	5	5	5		
Rear Wheel Dia.	inch	7	7	7	7		
Wheel Type	inch	2 Rigid,2 Swivel	2 Rigid,2 Swivel	2 Rigid,2 Swivel	2 Rigid,2 Swive		

SPN22AG

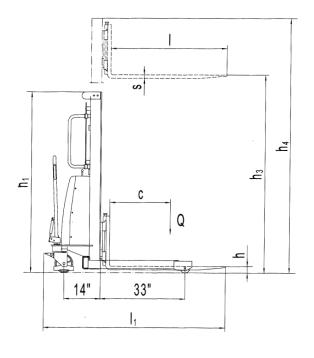



SPN22AG/SFH22AG

Manual&Semi-Electric Stacker

SFII22AF Manual Hydraulie Stackers -Adjustable Base Legs

- For lifting loads, skids, racks, and objects. Forks adjust from side to side to accommodate skid widths.
- Feature fold-away hydraulic foot pump for raising loads.
- Two-swivel and two rigid casters provide four wheel support for heavy loads.
- Include wheel lock and safety screen to ensure safety during operation.

SPN22AG

Semi-electric Stacker -Adjustable Base Legs

- Adjustable base legs for lifting loads, skids, racks, and objects.
- Forks adjust from side to side to accommodate skid widths.
- Adjustable forks lowers to the minimum height 2 1/8".
- Study and reliable mast made of rolled U-profiles. Hard chrome plated piston. Adjustable lifting chain. Powerful lift motor 2.1 HP.
- Integrated 150 AH maintenance free battery supplies strong power to effect frequent lifting tasks, an integrated charger facilitates easy and reliable charging of the integrated battery.



7719 Edison Ave

Fontana, Ca 92336



info@esslifts.com



833-377-5438



www.esslifts.com

AUTHORIZED DEALER

ESS LIFTS



Official Website